SUPATOOL PREMIUM

TOOL TROLLEY
6 DRAWER (660mm/26")
STP7726

OPERATION MANUAL

CAUTION: TAKE SAFETY PRECAUTIONS WHEN USING YOUR TOOLBOX





Do not open more than one drawer at a time. | Do not step on drawers. | Do not let children near the Toolbox. | Do not separate Chest from Trolley. | Do not exceed Drawer Load Limit | Not suitable for mounting in Vehicles | Set the brake on the locking castors unless your are moving the Toolbox. | Lock drawers and lid before moving the Toolbox.



IMPORTANT:

THIS OPERATING MANUAL CONTAINS IMPORTANT SAFETY INFORMATION. READ CAREFULLY AND UNDERTAND ALL INFORMATION BEFORE OPERATING TOOL TROLLEY SAVE THIS MANUAL FOR FUTURE USE.

PARTS LIST



TOOL TROLLEY SPECIFICATIONS


	Width	Depth	Height
Overall	758mm	461mm	957mm
Overall (w/out Castors)	758mm	461mm	812mm
Small Drawers	583mm	400mm	57mm
Deep Drawers	583mm	400mm	132mm
Castor Size	114x38mm (4.5" x 1.5") 2 x Locking		
Weight	42.6kg		



7 x EVA Liners



Trolley Handle



Non-Locking Castors x 2



Locking Castors x 2



Keys x 2



16 x 12mm Bolts for Castors




4 x 10mm Bolts for Handle

TOOLS & ASSISTANCE NEEDED



2 People Lift

Castor



12mm Spanner or 5mm Hex Key

Handle



10mm Spanner

SUPATOOL PREMIUM


TOOL TROLLEY
6 DRAWER (660mm/26")
STP7726

ASSEMBLY INSTRUCTIONS

1 Handle Installing

- Position the trolley side handle behind the holes on the trolley.
- Attach with (4) bolts and tighten with an adjustable wrench.


Note: The side handle can be mounted to either side of the trolley.

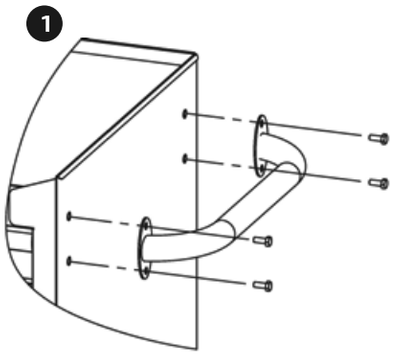

2 Castor Installing (If applicable)

- Be sure the drawers are locked and lay the trolley on its side.
- Secure castors to the unit using the 12mm bolts provided.
- Tighten with a 12mm spanner or 5mm hex key.
- Repeat this process for the castors on the opposite of the trolley.
- Return the trolley to its upright position.

Caution: Do not over tighten the bolts.
Caution: Both locking castors must be fitted to front of trolley.

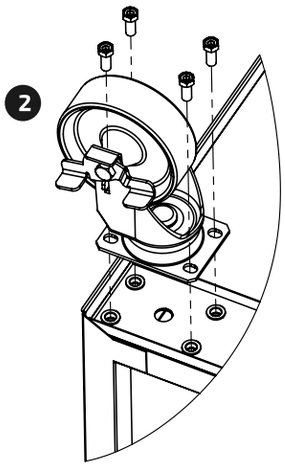

MAINTENANCE

1 Removing the Drawers


- Fully extend the empty drawer.
- Push up the right grey release lever while pushing down the left grey release lever.
- Pull the drawer outward until it is released from the drawer slide.

2 Re-Inserting The Drawers

- Extend the drawer slides.
- Insert the brackets on each side of the drawer into the slots on the slides, being careful that they are properly positioned.
- Once properly inserted, completely close the drawer to set the slides in their proper positions.

3

- Periodically tighten all hardware
- Periodically lubricate castors
- Lubricate the slides twice a year
- Lubricate the lock with graphite annually
- Use a damp Microfibre cloth to clean all surfaces

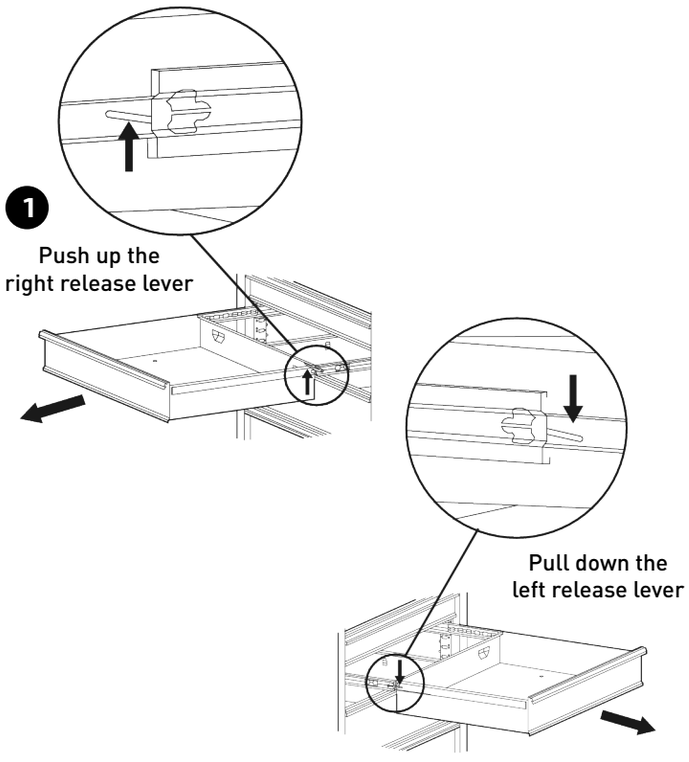

TOOL TROLLEY
6 DRAWER (660mm/26")
STP7726

REPLACEMENT PARTS



ITEM	PART NO.	DESCRIPTION	QUANTITY
1	STP7779	Key Only (Specify Key Number) X 1	1
2	STP7778	Lock & Key	1
3	STP7736-3	Trolley Handle	1
4	STP7726-3	Ball Bearing Slide (Pair)	6
5	STP7736-8	Castor Swivel x 1	2
6	STP7736-9	Castor Swivel x 1 (Locking)	2
7	STP7736-10	Castor Bolt Pack	1
8	STP7726-4	EVA Mat Pack 7 Piece	1

National Head Office
National Distribution and Showroom
3 Lakeview Dve, Caribbean Business Park
Scoresby Victoria 3179 Australia
ABN 41 007 185 006

Administration
T +61 3 9730 7100 F + 61 3 9730 7199

E enquiries@kincrome.com.au
W kincrome.com.au

Customer Service Centre
T 1300 657 528 F 1300 556 005

Made to Supatool Premium global specifications and quality standards in China

Kincrome UK Ltd PO Box 646 EASTLEIGH SO50 0NA

Australia & Global	UK & EU
www.kincrome.com.au	www.kincrome.co.uk
enquiries@kincrome.com.au	enquiries@kincrome.co.uk